

STANT COMMISSIONER FOR PATENTS
PATENT APPLICATION
Washington, D.C. 20231

CASE DOCKET NO. YO999-159
Date: April 12, 1999

Transmitted herewith for filing is the Patent Application of:

Inventors: R. M. Bolle et al
For: SYSTEM AND METHOD FOR LIVENESS AUTHENTICATION USING AN AUGMENTED
CHALLENGE/RESPONSE SCHEME

- ☒ Six(6) Sheets of formal Drawings.
- ☒ An assignment of the invention to International Business Machines Corporation, Armonk, New York 10504.
- ☐ Certified copy of ☐ Patent Application No.
- ☒ Declaration and Power of Attorney is attached to the application.
- ☐ Associate Power of Attorney.
- ☒ Information Disclosure Statement with form PTO-1449 with references attached.

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	19- 20 =	3
INDEP CLAIMS	5 - 3 =	2
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED		

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$ 760.00
X \$ 18 =	\$ 0.00
X \$ 78 =	\$ 156.00
+ \$ 260=	\$ 0.00
TOTAL	\$ 916.00

If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

- ☒ Please charge my Deposit Account No. 09-0468 in the amount of \$ 916.00.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 09-0468. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 35 CFR 1.17.

Respectfully submitted,

By Louis J. Percello
Attorney: Louis J. Percello
Registration No.: 29,551
Tel. (914) 945-3145

IBM CORPORATION
INTELLECTUAL PROPERTY LAW DEPT.
P.O. BOX 218
YORKTOWN HEIGHTS, NY 10598

SYSTEM AND METHOD FOR LIVENESS AUTHENTICATION USING AN AUGMENTED CHALLENGE/RESPONSE SCHEME

FIELD OF THE INVENTION

This invention relates to the field of image processing. More specifically, this invention relates to
5 authenticating acquired images using a sensor. More specifically, the invention deals with
authenticating the originality of biometrics data like fingerprint images.

BACKGROUND OF THE INVENTION

With the rapid growth of the Internet, many new e-commerce applications are being developed,
and deployed. For example, retail purchasing and travel reservations over the web using a credit
10 card are very common commercial applications. Today, the users are recognized using a userID
and password combination for identification and authentication purposes. Very soon, more secure
methods for authentication and possibly identification involving biometrics, such as fingerprint
and face images, will be replacing these simple methods of identification. An automated
biometrics system involves acquisition of a signal from the user that more or less uniquely
15 identifies the user. For example, in fingerprint-based authentication a user's fingerprint needs to
be scanned and some representation needs to be computed and stored. Authentication is then
achieved by comparing the representation of a newly scanned fingerprint to the stored
representation. In a speaker verification system a user's speech signal is recorded and some
representation needs to be computed and stored. Authentication is then achieved by comparing
20 the representation of a newly recorded speech signal to the stored representation.

In many unattended applications, the server or other computing device has the burden of ensuring that the data transmitted from a client is current and live information, not previously acquired or otherwise constructed or obtained information. With the rapid growth of the Internet, users are expected to be involved in a variety of remote unattended transaction applications. The

5 application server has to ensure that the transmitted information is fresh and has been acquired at the time requested, even more so in the case when any multimedia information is being submitted.

It is very easy to store digital multimedia information and recycle the stale information to the server. In many e-commerce applications, if the multimedia information is being used in a time-sensitive fashion, it is very important to ensure the authenticity of the multimedia information

10 for successful operation of the system.

One of the main advantages of Internet-based business solutions is that they are accessible from remote, unattended locations including the user's home. However, the biometrics signals can be intercepted or stored on the local machine in these remote and unattended locations or otherwise obtained from applications where the user uses her/his biometrics. The recorded signals can then

15 later be reused for unknown, fraudulent purposes such as to impersonate a registered user of an Internet service. The simplest method is that a signal is acquired once and reused several times.

Simple perturbations can be added to this previously acquired signal to give an impression that it is fresh. Detection of such misuse is difficult to determine at the server side. A more sophisticated attacker might create phony Internet businesses and acquire a copy of a user's biometric signal

20 and then with intelligent modifications to the signal, pose as this user to other Internet service providers. The financial implications of such attacks can be substantial.

Fingerprints have been used for identifying persons for several decades. In an automatic fingerprint identification system, the first stage is the image acquisition stage where the subject's fingerprint is sensed. The acquired image is then processed and matched against a stored template. There are several techniques to acquire a fingerprint including scanning an inked fingerprint, and
5 inkless techniques using optical, capacitive and other semiconductor-based sensing techniques. These sensing techniques typically locate ridges and valleys in the fingerprint.

PROBLEMS WITH THE PRIOR ART

There are ways to protect multimedia data and other information during transmission using cryptography techniques. Some well- known cryptographic techniques include RSA, DES, PKI
10 and digital signatures. The crypto techniques running on the client can still be provided with previously acquired images or multimedia data as there is no secure link between the near end of the encrypted communication channel and the image sensor. One way to verify the authenticity of an image is to compute a signature based on that image and transmit it in addition to the image. However, provided the encryption remains secure, all this ensures is that the image was acquired
15 by a valid device. It does not say when it was acquired.

A challenge/response system poses a challenge to the client and verifies the response against the enrolled response. Examples include asking a question like the user's mother's maiden name as the challenge and verifying that the same answer was provided as during enrollment.

Challenge/response systems can also be constructed where a secret software algorithm is used to

automatically generate a proper response to a digital challenge string. The standard challenge/response approach used in many on-line transaction systems keeps the signal sensor out of the loop. There is still an open path for attack between the image sensor and the processor. That is, one can feed images directly into the processor, bypassing the sensor.

- 5 Using encryption methods to securely transmit the biometrics signal deters snooping the network and makes decrypting intercepted transmissions virtually impossible. But locally on the client computer these techniques have no impact.

- Today the biometrics sensors such as a camera, fingerprint scanner or a microphone do not have bi-directional transmission and do not have the computational capacity to compute any sort of
- 10 digital signature on the sensor. Yet, any hardware separation between the real sensor and the client computer leaves security holes in the system. In summary, while the prior art can access and securely transmit biometric information/images (fingerprints) -- prior art fails to verify that the biometrics information was obtained from the proper source at the proper time.

- Friedman (U.S. Patent number 5,499,294) describes a digital camera with a processor for
- 15 authentication of images. The camera stores a private and public key pair to compute a hash function of the image. The hash function can be verified by using the public key. There are no external challenges involved in this system. There is no attempt to guarantee liveness. Also, the adopted mode of cryptography is known to be compute intensive and involve management of the keys.

Haber and Stornetta (U.S. Patent number 5,136,647) describe a method for secure time stamping a digital document including images and audio signals. The method validates only their temporal existence by using a trusted server-based time stamping scheme. This time stamping is done remotely, not at the source of the signal. The method does not guarantee liveness of the signal, i.e., if the same signal is sent to system twice with a time interval, the system would validate both of them.

Bennet et al (U.S. Patent number 5,764, 769) describe a method to authenticate digital video and audio recordings. In their method the authenticating video camera uses the challenge to set the tunable parameters. The trusted repository stores the challenges and the snapshot of the video. In a biometrics system often the best images are obtained by dynamically adjusting the camera or sensor parameters to acquire the best possible image. Hence, setting camera parameters, as would be required by Bennet, is not advisable. Secondly, the system involves a storage server which is not required in a transaction-based system.

These above mentioned patents and the following references, which give further background, are incorporated by reference in their entirety:

Stuart A. Haber and Wakefield S. Stornetta, Jr.,
Method for secure time-stamping of digital documents
U.S. Patent number 5,136,647, Aug. 1992

Gary L. Friedman,

Digital camera with apparatus for authentication of images produced from an image file

U.S. Patent number 5,499,294, Mar. 1996

Charles Henry Bennet, David Peter DiVincenzo and Ralph Linsker,

Digital recording system with time-bracketted authentication by on-line challenges and method of

5 authenticating recordings

U.S. Patent number 5,764,769, June 1998

OBJECTS OF THE INVENTION

An object of this invention is an improved system and method for authenticating multimedia information signals like images and video.

10 An object of this invention is an improved system and method for authenticating biometric information like fingerprint images, face images/video, and speech signals.

An object of this invention is an improved system and method for ensuring that the biometric provided/transmitted/sensed is a newly acquired biometric.

15 An object of this invention is an improved system and method for ensuring that the biometric provided/transmitted/sensed is a biometric newly acquired by a specific sensor.

SUMMARY OF THE INVENTION

The present invention achieves these and other objectives by ensuring that a computer (e.g. a server) authenticates the signal source obtained (e.g. at the client). A challenge/response system is augmented by data from the sensor acquiring the biometric (e.g. fingerprint) and a response is computed on the same physical sensor so that there is a significantly reduced opportunity for
5 tampering. Portions of the augmentation parameters can be easily modified to address the situation where the current algorithm used for computing the response has been uncovered by criminally intended computer hackers.

The system has one or more acquisition devices for creating a representation of one or more input signals. A signal output is connected to one or more application devices. A responder receives
10 the signal representations from the acquisition devices, in response to challenges received from one or more challenge generator devices, and the responder sends responses that are a function of the signals and the challenges. These signal representations can be verified by comparing the responses to the function of the signals and the challenges.

These basic techniques can be extended to acquisition devices generating signal representation
15 from various types of multimedia such as voice and video signals.

BRIEF DESCRIPTION OF THE DRAWING

Figure 1 is a block diagram of one preferred embodiment of the present invention in a networked application.

Figure 2 is a block diagram of a client.

Figure 3 is a block diagram of a hardware embodiment of a responder in a client.

Figure 4 is a flow chart of a challenge responder embodied as a process in the sensor at the client.

Figure 5 is a block diagram of a preferred server.

5 Figure 6 is a flow chart a transaction process as performed by the server.

Figure 7 is hardware embodiment of a three server model-based business process.

DETAILED DESCRIPTION OF THE INVENTION

This invention relates to authenticating acquired images using a sensor. More specifically, it deals with authenticating the originality of biometrics data like fingerprint images. By adding a signature
10 specifically computed from the acquired image in the sensor, authenticity of the image is ascertained. The integrated sensor has the power to augment an external challenge using the image and compute the response to the augmented challenge. Previously acquired or otherwise constructed or obtained digital images being fraudulently resubmitted to a server can be rejected using this technique.

The invention has components on the sensor and other components on the server. The components on the sensor are: (i) a challenge augmentor; and (ii) a response generator. On the server, the components are: (i) a challenge generator, (ii) a response verifier, and (iii) a list of which response algorithm is being used by each client.

- 5 In a preferred embodiment, a challenge is an arbitrary string of bits. It is desirable that the challenges repeat very seldom, if ever. It must also be difficult to predict the next challenge from a history of previous challenges or commonly available information such as the time of day. The response generator likewise produces a string of bits which depends on the particular challenge issued. However, in a preferred embodiment, the same challenge should not always generate the
- 10 same response. It is best if the response generator also considers the properties of the image as well in generating its answer. In effect, the original challenge has been augmented by the complete data of the image to create a new challenge. One scheme is to interpret the challenge as a request to return the intensity values at certain pixel locations specified by the challenge string.
- 15 A secondary augmentor can conditionally alter the challenge posed to the client system using locally modifiable parameters. By being able to change the augmentation function as needed, the security of the system is greatly enhanced. One simple secondary augmentation is to add a translation to the selected locations described above.

The server maintains the list of sensors with their secondary augmentation parameters. A somewhat less secure method would have the client send its augmentation parameter directly to the server every time. On receiving the authentication tag, the server verifies the response by first

computing the response on the image/signal and the augmented challenge. The augmented challenge is then computed by consulting the table of the sensor and augmentor parameters. Then, if the response and the tag match, the image/signal is considered authentic otherwise it is rejected.

5 An embodiment of the present invention in a networked application is shown in Figure 1. The local machine 100 comprises an integrated image sensor 110 and the client 120. The local machine 100 is connected to the server 140 over a network 130. Computers used as clients 120, networks 130, and servers 140 are well known. Sensors 110 include fingerprint scanners, video cameras, still cameras, microphones, iris scanners, hand geometry sensors, and electronic smell
10 sensors.

The client shown in Figure 2 interfaces with the server through a known network interface 230. The client comprises one or more memories 210 and other known resources needed to execute the client process 240. The sensor interface 220 handles the interactions with the integrated image sensor 110. The sensor interface controls acquisition and sequencing parameters of the sensing
15 device over a data connection such as ISA bus, PCMCIA interface, PCI bus, USB port, RS-232 serial port, parallel port, IEEE 1394 serial bus. The client process 240 is described in Figure 4.

The block diagram of a hardware embodiment of the sensor and responder in a client is shown in Figure 3. The sensor area 310 is the physical area for sensing the multimedia signal. The sensor
20 can be a CCD light sensitive device, CMOS electrostatic imager, MEMS pressure transducer. A

hardware integrated processor 320 acts as the responder. The integrated processor responds to challenges augmented by the challenge augmentor 330 and the sensed multimedia signal. The challenge augmentor can be easily replaced or reprogrammed so that the challenges can be augmented easily in many different ways. Augmented challenges, in general, are transformed challenges through the means of, for example, a function.

For instance, the augmenter might be able to compute either of two selectable functions, “x1+” and “x10+”. Bank A might use function “x1+” in all its units, while Bank B might use “x10+” in all of its. Or, alternatively, for even number transactions function “x10+” might be used, and for odd numbered transaction “x1+” is used. Hence, the challenge augmenter modifies the challenge through one or more functions. In turn, these functions can be determined by an external source 340. The external source can be a set of switches, a clock, a global position system signal, a pseudo-random number generator and an external computer. In a preferred embodiment the sensor area 310 and integrated processor 320 and challenge augmenter 330 are fabricated on the same piece of silicon. In another preferred embodiment these 3 pieces are enclosed in a tamper-resistant module that may be of a conventional design; e.g. a wire-embedded epoxy package in which intrusion is sensed by a change of the electrical resistance of the wire.

Figure 4 is a flow chart of the client process 240 running on the integrated processor 320. The client process receives the image (or multimedia signal) in step 410. On receiving the challenge the augmentor in step 420 combines this with data from the image, then in step 430 computes a valid response to the augmented challenge. The response to the challenge is outputted in step 440. A typical challenge might be “3, 10, 50”. This would be augmented by appending all the pixels

values of the image (in scan order) to the end of the challenge string. The client process then selects the 3rd, 10th and 50th pixel value from this sequence to generate an output response such as "133, 92, 176". Other examples of responder function includes computing a checksum of a segment of the signal, a set of pseudo-random samples, a block of contiguous samples starting at a specified location and with a given size, a hash of signal values, and a specified known function of selected samples of the signal. A combination of these functions can be used to achieve arbitrarily complex responder functions.

A preferred embodiment of a server 140 is shown in Figure 5. Over the network 130, the server receives the signal and the response from the client. In a table 510 or by other methods, the server stores the augmentation configuration for each sensor. The responder unit 520 computes the response to the augmented challenge and the signal. If the response comparator 530 finds the response received from client and the responder unit 520 to be same, it outputs OK or accepts the multimedia signal. Otherwise, the response comparator returns an error or rejects the multimedia signal sent for validation. Continuing with the above example, the server knows that the challenge "3, 10, 50" has been issued. It also has access to the full digital image (typically sent in the clear). It then uses its secret knowledge of client process 240's responder program to interpret the challenge to mean the 3rd, 10th, and 50th pixel of the image (as opposed to, say, the 30th, 100th, and 500th pixel). So the server also generates the response "133, 92, 176" and checks if this matches what was sent along with the image.

A business process based on the invention is presented in Figure 6. The clients initiates a request to start a transaction by sending the sensor number to the server in step 605. For instance, a

customer wishes to purchase a shirt at a departmental store using a credit card. The local store terminal reads the credit card and transmits the credit card number and the transaction amount to the transaction server. The transaction server then requests a challenge from the authentication server in step 610. The authentication server generates a challenge such as “3,10,50” in step 615 and communicates to the transaction server. The transaction server in turn transmits the challenge to the client (i.e., the local store terminal) as shown in step 620.

On receipt of the challenge by the client, the integrated sensor and responder is presented with the challenge in step 625. The integrated sensor senses the image (or signal) in its sensing area in step 630. For instance, the digital representation of the ridges and valleys of the fingerprint is formed. The challenge gets augmented in step 635 by the integrated processor using the replaceable challenge augmentor. For example, the challenge augmentor could be the function “x10+” which takes the original challenge “3, 10, 50” and converts it to “30, 100, 500” and also appends all the pixels values in the acquired image to form, in effect, a new, more complicated challenge. The response to the augmented challenge is computed (e.g., “133, 92, 176”) in step 640 and is communicated to the client in step 645. The client (i.e., local store terminal) transmits the signal (e.g., fingerprint image), the response to the challenge, and the sensor identification number (e.g., “S/N 1234”) to the transaction server in step 650.

On receipt of the signal, response and id, the transaction server transmits all the parts to the authentication server in step 655. In step 660, the authentication server computes the response to the augmented challenge and compares with the response received from the client in step 665. To do this, it first looks up the augmentation function being used by the store terminal (i.e. sensor ID

“S/N 1234” is registered as using function “x10+”). It then augments the challenge it issued in the appropriate way and computes the expected response (“3, 10, 50” becomes “30, 100, 500” which results in “133, 92, 176”). If this matches the transmitted response, the authentication server knows that the associated image was taken in response to the issued challenge and hence is newly
5 acquired, not a resubmitted stored image.

Using step 670, the authentication server communicates the verdict to the transaction server. If the verdict was not to accept (step 675), the client transaction is canceled in step 680. In our example, the customer would be denied his new shirt. It might also be desirable to record for later investigation the fact that a presumably non-live image was received purportedly from that
10 particular store or of that particular customer. Otherwise, in step 685 the transaction server transmits the image (signal) to the biometrics server.

The biometrics server matches the features of the signal with the template database in step 690 and send its verdict to the transaction server in step 692. This step typically involves the comparison of the signal to a stored biometrics representation. For instance, are the minutiae from
15 the fingerprint image (signal) in approximately the same location as those on file for the customer requesting the transaction.

If the verdict is to accept, the transaction server executes the transaction in step 696 and sends an acknowledgment to client in step 698 and completes the transaction. Otherwise, control is transferred to step 680 where the transaction is canceled.

Figure 7 shows a hardware configuration of a business process involving the interaction between a client 100 and three servers: a transaction server 710, an authentication server 720, and a biometrics server 730. The various messages exchanged between the machines serve to implement the various steps of the Flowchart in figure 6 as indicated. Some of the steps are performed wholly within a single server as indicated by the step numbers within each box in the figure.

The business process 700 is that 710 is a transaction business where a transactor performs transactions such as purchases or service transactions, like bank statements. The transactor has to be authenticated through some biometrics. Business 720, which could be independent from business 710, on the other hand, validates that the biometrics is acquired by the right sensor at the right time. This is because the sensors are registered on server 720 and 720 challenges the sensor in client 100. Business 730 authenticates the transactor's biometrics. The transactor has registered her biometrics with 730 and 1 : 1 biometrics matching is performed at 730.

Business 720 does not necessarily have to only deal with transaction business 710. It can interact with a plurality of transaction servers. Similarly, biometrics authentication business can interact with more than one transaction businesses 730. Business 720 and business 730 can be combined into one business that offers its services to multiple transaction servers. Server 710, 720 and 730 can be combined into one. At the same time, 710 can employ multiple authentication servers and multiple biometrics servers.

Business process 700 can be implemented with a variety of biometrics, such as fingerprints, face, iris, voice. It can also use one or more fingerprints, two irises or combinations of these biometrics.

CLAIMS

We claim:

1. A system for authenticating one or more acquired signals, the system comprising:

one or more acquisition devices for creating a representation of one or more input signals, a signal

5 output connected to one or more application devices; and

a responder receiving the signal representations from the acquisition devices, and, in response to challenges received from one or more challenge generator devices, and the responder sending one or more responses that are a function of the signals and the challenges, the signal representations capable of being verified by comparing the responses to the function of the signals and the

10 challenges.

2. A system as in claim 1, where the signal representation is digital.

3. A system as in claim 2, where the responder is a computer system having one or more central processing units and one or more memories.

15 4. A system, as in claim 1, where the signal is one or more of the following: a biometric signal, a fingerprint image, a face image, an iris image, an audio signal, and a speech signal.

5. A system, as in claim 1, where the acquisition device is one or more of the following: a camera, a biometrics sensor, a semiconductor-based fingerprint sensor, a micro-mechanical sensor, and a microphone.

6. A system, as in claim 1, where the responder has two or more selectable functions, the
5 functions being selected by one or more configuration inputs and the functions modifying the challenge.

7. A system, as in claim 6, where the configuration inputs are connected to an external source that selects the function.

8. A system, as in claim 7, where the external source includes one or more of the following:
10 a set of switches, a jumper block, a clock, a global positioning system signal, an external computer, and a pseudo-random number generator.

9. A system, as in claim 1, where the responder function includes one or more of the following: a checksum, a pseudo-random sample, a block of contiguous samples, and a function of selected samples of the signal.

15 10. A system, as in claim 1, where the acquisition device and the responder are both located on a single semiconductor chip.

11. A system, as in claim 1, where the signal representation is transmitted to the application device over a network.

12. A system, as in claim 1, where the challenge is received over a network and the response is transmitted over the network.

5 13. A system, as in claim 1, where the application device is one or more of the following: a computer, a transaction processor, a web server, and a database system.

14. A system for authenticating one or more acquired signals, comprising:

means for creating a representation of one or more input signals;

means for creating one or more challenges;

10 means for creating responses that are a function of the input signals and the challenges; and

means for verifying the responses by comparing them to the function of the input signals and the challenges.

15. A method for authenticating one or more acquired signals, comprising the following steps:

creating a representation of one or more input signals;

creating challenges;

creating responses that are a function of the input signals and the challenges; and

verifying the responses by comparing them to the function of the input signals and the challenges.

16. A computer product for authenticating one or more acquired signals that performs the
5 following steps:

creating a representation of one or more input signals;

creating challenges;

creating responses that are a function of the input signals and the challenges; and

verifying the responses by comparing them to the function of the input signals and the challenges.

- 10 17. A business process for authenticating one or more acquired signals, the process comprising
the steps of:

creating a representation of one or more input signals;

creating challenges;

creating responses that are a function of the input signals and the challenges; and

verifying the responses by comparing them to the function of the input signals and the challenges.

18. A business process, as in claim 17, where the input signals include any one or more of the

5 following: one or more fingerprints, face, iris, and voice.

19. A business process, as in claim 17, where the challenge response functions include any one or more of the following: signal values at discrete points, a mathematical function of discrete signal values, a hash of the signal values, and a checksum of the signal values in a delimited area.

ABSTRACT

An integrated signal sensor with processing power to augment a challenge from server and compute the response is proposed to guarantee that the sensed signal is live and not stored. The sensor-processor computes the response to the augmented challenge based on the signal

- 5 characteristics of the sensed signal and then transmits both the signal and the response. The host or the server can verify the response to authenticate liveness of the input image/signal and reject it if the response is different. Areas of application include automated biometrics and remote medical imaging.

662F40" 54906260

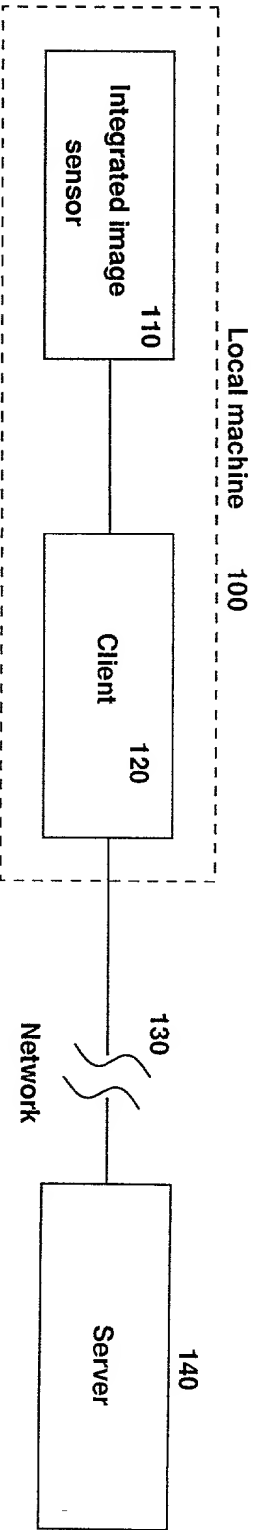


Figure 1: Block diagram of an embodiment in a networked application.

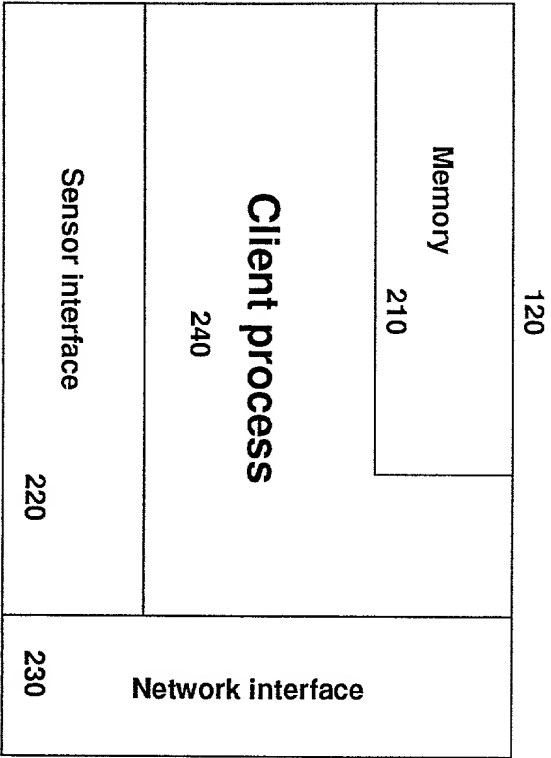


Figure 2: Block diagram of a client.

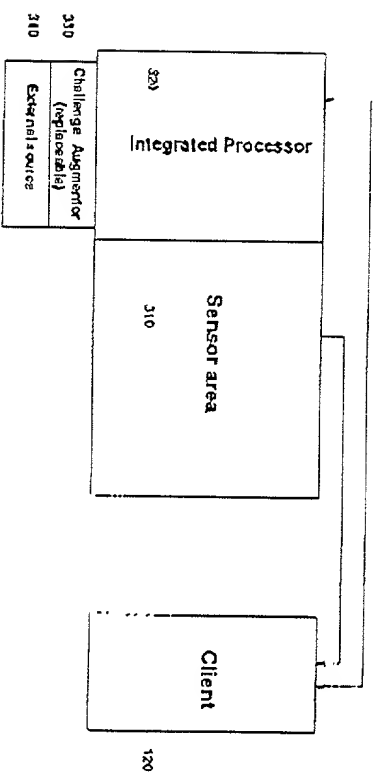


Figure 3: Block diagram of a hardware embodiment of integrated sensor and responder in a client.

240

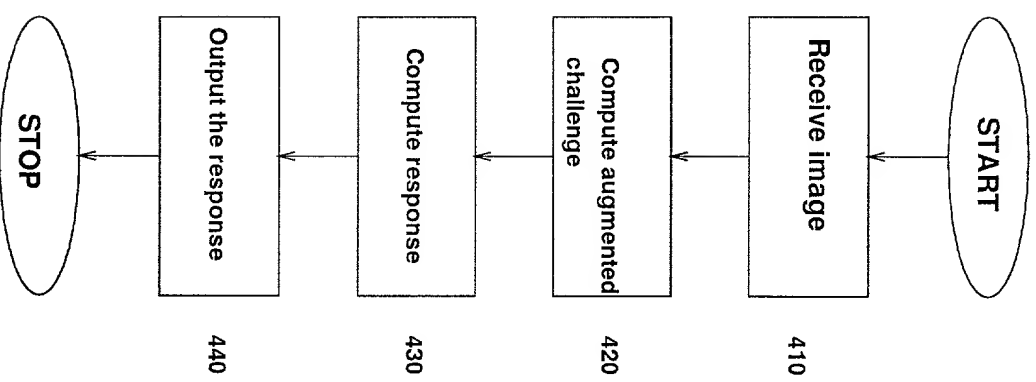


Figure 4: Flow chart of responder embodied as a process in a client.

Variable	Mean	Standard Deviation	Minimum	Maximum
Age	34.5	10.2	21	55
Gender	0.5	0.5	0	1
Marital Status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	15000	5000	5000	30000
Health	0.8	0.2	0	1
Smoking	0.3	0.5	0	1
Drinking	0.2	0.4	0	1
Exercise	0.4	0.5	0	1
Stress	0.6	0.5	0	1
Sleep	0.7	0.3	0	1
Appetite	0.8	0.2	0	1
Mood	0.9	0.1	0	1
Energy	0.7	0.3	0	1
Concentration	0.8	0.2	0	1
Memory	0.9	0.1	0	1
Emotion	0.7	0.3	0	1
Behavior	0.8	0.2	0	1
Thought	0.9	0.1	0	1
Feeling	0.8	0.2	0	1
Perception	0.9	0.1	0	1
Attention	0.8	0.2	0	1
Intuition	0.7	0.3	0	1
Imagination	0.6	0.4	0	1
Reasoning	0.9	0.1	0	1
Logic	0.8	0.2	0	1
Analysis	0.9	0.1	0	1
Synthesis	0.7	0.3	0	1
Evaluation	0.8	0.2	0	1
Comparison	0.9	0.1	0	1
Classification	0.8	0.2	0	1
Organization	0.7	0.3	0	1
Planning	0.9	0.1	0	1
Problem Solving	0.8	0.2	0	1
Decision Making	0.9	0.1	0	1
Communication	0.7	0.3	0	1
Interpersonal Skills	0.8	0.2	0	1
Teamwork	0.9	0.1	0	1
Leadership	0.7	0.3	0	1
Management	0.8	0.2	0	1
Coordination	0.9	0.1	0	1
Organization	0.8	0.2	0	1
Planning	0.7	0.3	0	1
Problem Solving	0.9	0.1	0	1
Decision Making	0.8	0.2	0	1
Communication	0.7	0.3	0	1
Interpersonal Skills	0.8	0.2	0	1
Teamwork	0.9	0.1	0	1
Leadership	0.7	0.3	0	1
Management	0.8	0.2	0	1
Coordination	0.9	0.1	0	1
Organization	0.8	0.2	0	1
Planning	0.7	0.3	0	1
Problem Solving	0.9	0.1	0	1
Decision Making	0.8	0.2	0	1
Communication	0.7	0.3	0	1
Interpersonal Skills	0.8	0.2	0	1
Teamwork	0.9	0.1	0	1
Leadership	0.7	0.3	0	1
Management	0.8	0.2	0	1
Coordination	0.9	0.1	0	1
Organization	0.8	0.2	0	1
Planning	0.7	0.3	0	1
Problem Solving	0.9	0.1	0	1
Decision Making	0.8	0.2	0	1
Communication	0.7	0.3	0	1
Interpersonal Skills	0.8	0.2	0	1
Teamwork	0.9	0.1	0	1
Leadership	0.7	0.3	0	1
Management	0.8	0.2	0	1
Coordination	0.9	0.1	0	1
Organization	0.8	0.2	0	1
Planning	0.7	0.3	0	1
Problem Solving	0.9	0.1	0	1
Decision Making	0.8	0.2	0	1
Communication	0.7	0.3	0	1
Interpersonal Skills	0.8	0.2	0	1
Teamwork	0.9	0.1	0	1
Leadership	0.7	0.3	0	1
Management	0.8	0.2	0	1
Coordination	0.9	0.1	0	1
Organization	0.8	0.2	0	1
Planning	0.7	0.3	0	1
Problem Solving	0.9	0.1	0	1
Decision Making	0.8	0.2	0	1
Communication	0.7	0.3	0	1
Interpersonal				

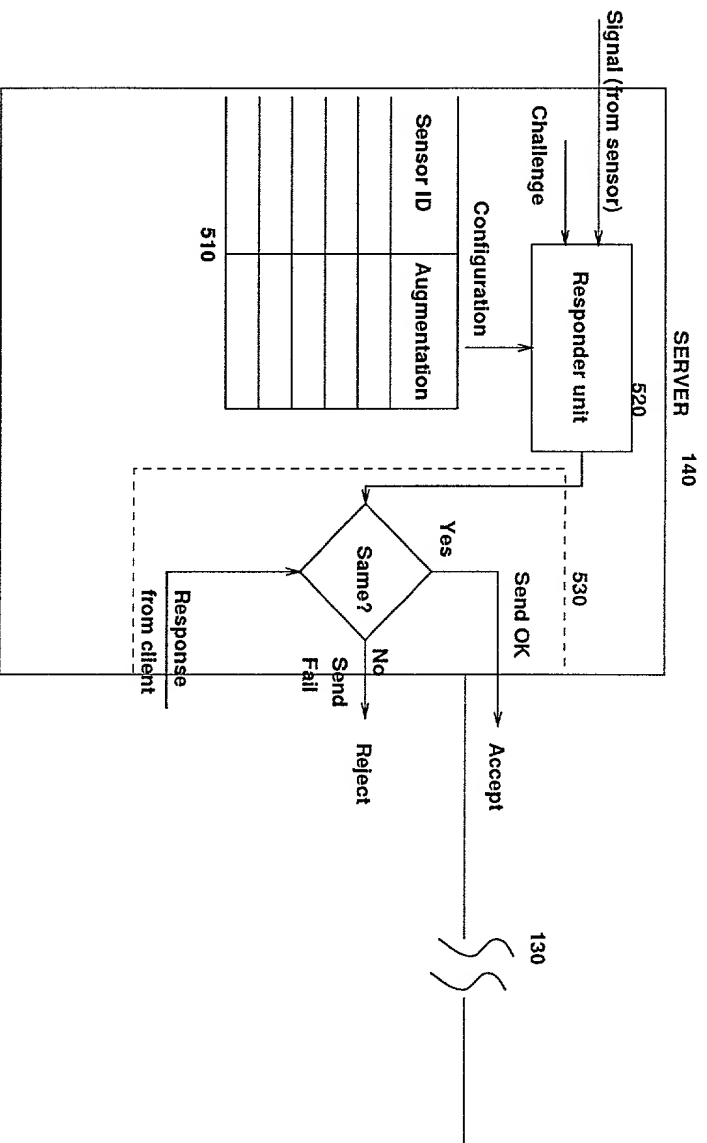
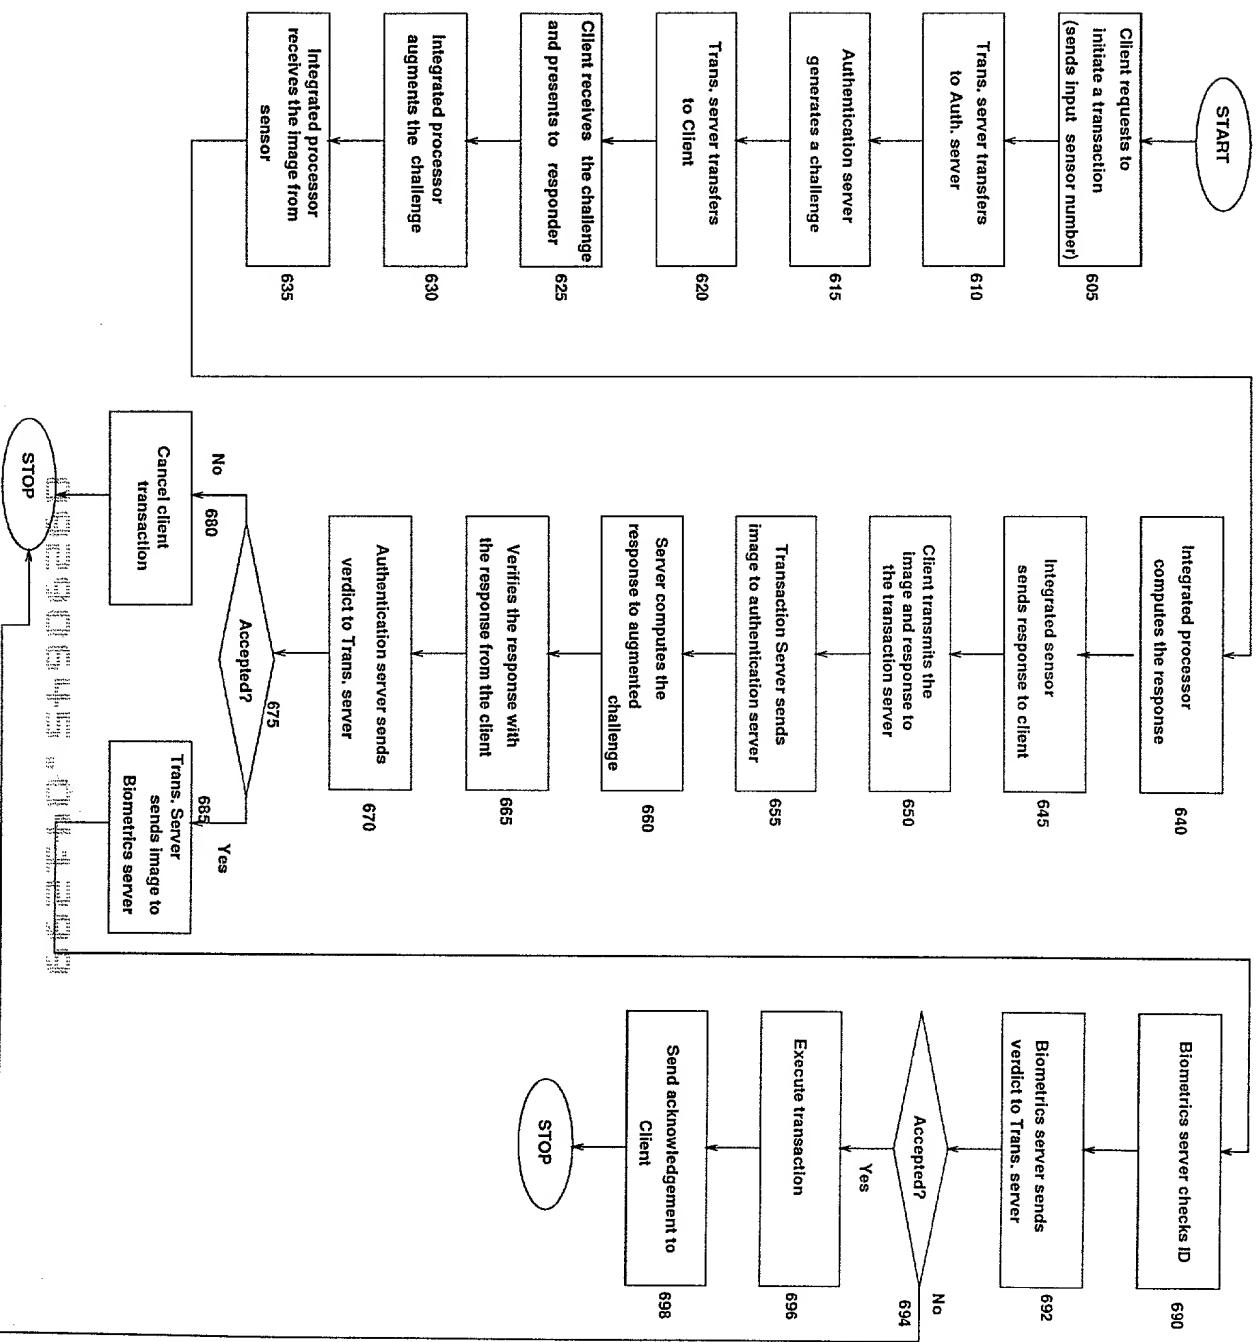


Figure 5: Block diagram of a preferred server.

Figure 6



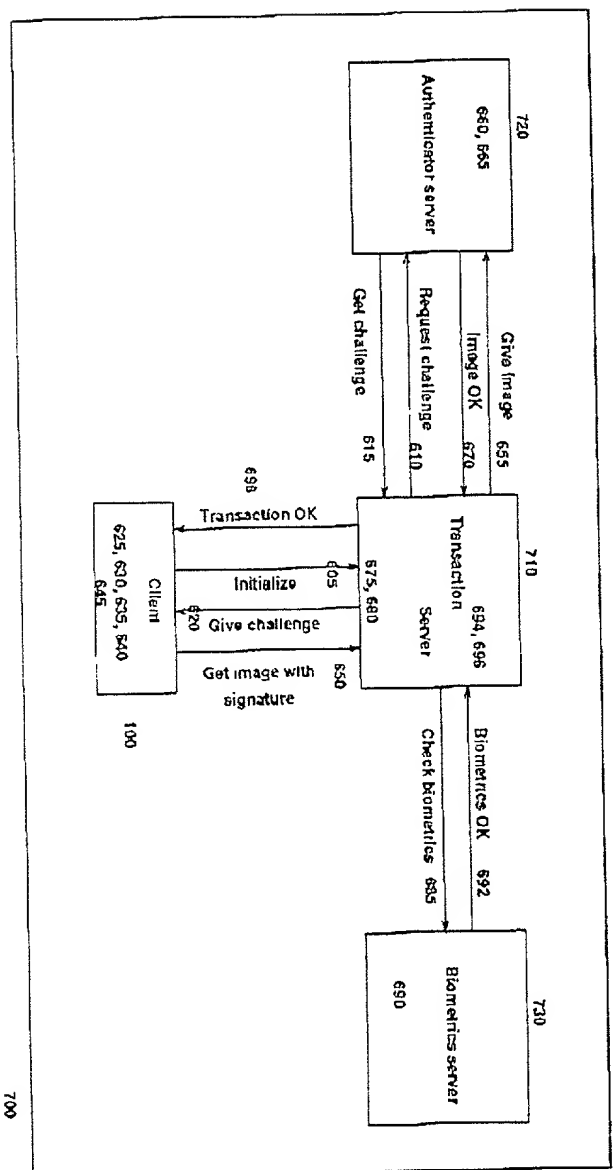


Figure 7: A three server model of the business process.

Table 1. Continued	
Variable	Mean (SD)
Age (years)	61.2 (10.5)
Gender	
Male	50.0
Female	50.0
Marital status	
Married	50.0
Single	50.0
Divorced	50.0
Widowed	50.0
Education (years)	12.5 (2.5)
Income (US\$)	25,000 (15,000)
Health status	
Good	50.0
Fair	50.0
Poor	50.0
Smoking status	
Smoker	50.0
Nonsmoker	50.0
Alcohol consumption	
Regular	50.0
Occasional	50.0
None	50.0
Exercise frequency	
Daily	50.0
Weekly	50.0
Monthly	50.0
Never	50.0
Stress level	
High	50.0
Medium	50.0
Low	50.0
Depression score	15.0 (5.0)
Loneliness score	10.0 (3.0)
Life satisfaction score	20.0 (7.0)
Quality of life score	30.0 (10.0)
Overall health score	40.0 (15.0)

Docket No. YO999-159

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SYSTEM AND METHOD FOR LIVENESS AUTHENTICATION USING AN AUGMENTED CHALLENGE/RESPONSE SCHEME

the specification of which (check one)

☒ X is attached hereto.

_____ was filed on _____ as United States Application Number _____

or PCT International Application Number _____

and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application, having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
_____	_____
_____	_____

I hereby claim the benefit under 35 U.S.C. §120 of any United States Application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States, or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
_____	_____	_____
_____	_____	_____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

Manny W. Schecter (Reg. 31,722), Terry J. Ilardi (Reg. 29,936), Christopher A. Hughes (Reg. 26,914), Edward A. Pennington (Reg. 32,588), John E. Hoel (Reg. 26,279), Joseph C. Redmond, Jr. (Reg. 18,753), Douglas W. Cameron (Reg. 31,596), Louis P. Herzberg (Reg. 41,500), Kevin M. Jordan (Reg. 40,277), Stephen C. Kaufman (Reg. 29,551), Daniel P. Morris (Reg. 32,053), Louis J. Percello (Reg. 33,206), Jay P. Sbrollini (Reg. 36,266), David M. Shofi (Reg. 39,835) and Robert M. Trepp (Reg. 25,933) and Paul J. Otterstedt (Reg. 37,411).

Send Correspondence to: Louis J. Percello, Intellectual Property Law Dept.

IBM Corporation, P.O. Box 218, Yorktown Heights, New York 10598

Direct Telephone Calls to: (name and telephone number) _____

Rudolf Maarten Bolle
Full name of sole or first inventor

[Signature]
Inventor's Signature

4/9/99
Date

83 Nottingham Road, Bedford Hills, New York 10507
Residence


Netherlands
Citizenship

Same as above
Post Office Address

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Jonathan Hudson Connell

Full name of second joint-inventor, if any



Inventor's signature

4/9/99
Date

25 Pamela Road, Cortlandt-Manor, New York 10567-7112

Residence

USA

Citizenship

same as above

Post Office Address

Nalini K. Ratha

Full name of third joint-inventor, if any



Inventor's signature

4/9/99
Date

14 Granada Crescent, Apt. #17, White Plains, New York 10603

Residence

India

Citizenship

Post Office Address

Full name of fourth joint-inventor, if any

Inventor's Signature

Date

Residence

Citizenship

Post Office Address

Full name of fifth joint inventor, if any

Inventor's Signature

Date

Residence

Citizenship

Post Office Address

Full name of sixth joint-inventor, if any

Inventor's signature

Date

Residence

Citizenship

Post Office Address